


Horizontal Wrapper

KPS' automatic horizontal winder starts the film, wraps the product with a predetermined number of wraps and cuts the film when done. All KPS Horizontal Winders are fully guarded with expanded metal.

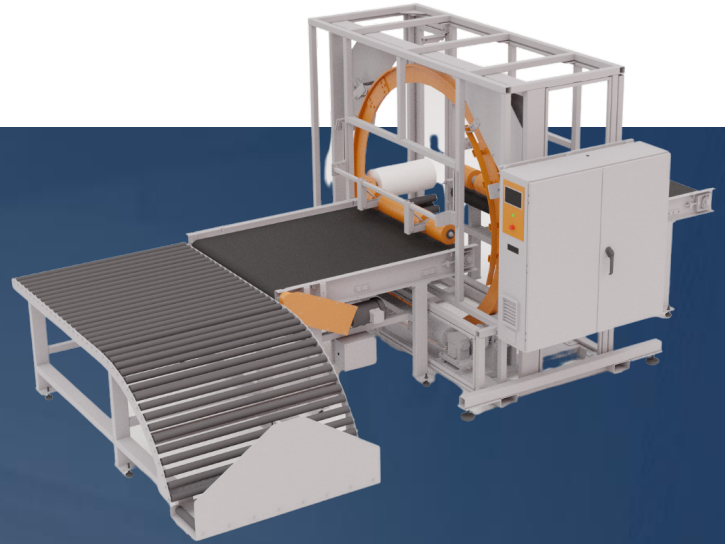

Standard specifications for the KPS automatic horizontal wrapper with heavy-duty direct friction variable speed drives and 4,000 lbs. weight capability are below. However, whatever your needs are, let us know, and we will develop a plan to design and build your customized wrapper.

PERFORMANCE:

- Up to 80 RPM based on ring size
- Load weight dependent on conveyor capacity
- Fully guarded frame
- Frame: structural steel tube, plate and bar meet ASTM-A36 or ASTM-A500
- Interlock access door
- AC motor with variable frequency drive
- Control - PLC with HMI
- Film capacity 10" roll diameter
- Standard film width 12"
- Allen Bradley PLC controls all wrap functions
- Allen Bradley AC drives
- NEMA 12 control cabinet with quick disconnect
- Air hold down photoeye activation (if applicable)
- Powder Coat finish
- Automatic film attach
- Automatic film cut-off

CONVEYOR OPTIONS:

- Accumulation Conveyors
- Gravity Conveyors
- Lift Conveyors
- Product Infeed Conveyors
- Product Outfeed Conveyors
- Pop-up Conveyors
- Load Dimensions
- Chains, Belts, V-belts, Roller, etc.

ELECTRICAL:

- 480/3/60Hz

AIR REQUIREMENTS:

- Clean, Dry Air, 3-5 CFM, 80 PSI

ADDITIONAL OPTIONS:

- Power Requirements
- Cold Environment
- Corrosive Environment
- Freezer Environment
- Fork Truck Stop
- Safety Fence, Rail and/or Light Curtains

kps | **KALAMAZOO**
PACKAGING SYSTEMS

900 47th St SW, Suite J
Wyoming, MI 49509
(616) 534-2600

kalpack.com